



⚠ WARNING	
 <p>DEATH or SERIOUS INJURY can occur</p> <ul style="list-style-type: none"> • Children 12 and under can be killed by the air bag • NEVER put a rear-facing child seat in the front unless air bag is off • Sit as far back as possible from the air bag • ALWAYS use SEAT BELTS and CHILD RESTRAINTS 	<p>REPLACE AIR BAG SYSTEM NO LATER THAN 15 YEARS AFTER THE MANUFACTURE DATE OF YOUR VEHICLE</p>

Top of drivers visor

⚠ WARNING	
 <p>DEATH or SERIOUS INJURY can occur</p> <ul style="list-style-type: none"> • Children 12 and under can be killed by the air bag • NEVER put a rear-facing child seat in the front unless air bag is off • Sit as far back as possible from the air bag • ALWAYS use SEAT BELTS and CHILD RESTRAINTS 	<p>REPLACE AIR BAG SYSTEM NO LATER THAN 15 YEARS AFTER THE MANUFACTURE DATE OF YOUR VEHICLE</p>

Top of passenger visor

	<p>AIR BAG WARNING FLIP VISOR OVER</p>
---	---

Under drivers visor

	<p>AIR BAG WARNING FLIP VISOR OVER</p>
---	---

Under passenger visor

⚠ WARNING
<p>Children Can Be KILLED or INJURED by Passenger Air Bag Make sure all children 12 and under use seat belts or child seats.</p>

Air bag cover

<p>UNLEADED FUEL ONLY ESSENCE SANS PLOMB COD.9466107</p>
--

Left dash by fuel door release button



Behind fuel door





Under drivers door

TIRE AND LOADING INFORMATION			
SEATING CAPACITY: TOTAL 2 FRONT REAR			
The combined weight of occupants and cargo should never exceed 220 Kg or 485 lbs.			
TIRE	SIZE	COLD TIRE PRESSURE	SEE OWNER'S MANUAL FOR ADDITIONAL INFORMATION
FRONT	245/35 ZR18	240 KPA, 35 PSI	
REAR	335/30 ZR18	240 KPA, 35 PSI	
SPARE	NONE	NONE	





Drivers door end




Door Jamb



Clear tape or plastic over it.

 <i>automobili Lamborghini</i> 		
LUBRICATION		
Items to be serviced	Oil type	Specifications
Engine	AGIP SINT 2000 SAE 5W/40	API - S/J/CF
Gearbox	AGIP ROTRA LSX SAE 75W/90	MIL - L2105 D
Seals and speed	TUTELA CS SPEED/FLI	
Rear differential	AGIP ROTRA LSX SAE 75W/90	MIL - L2105 D
Brake / clutch system	ATE TYP200	DOT 4 SAE J 1703
Cooling system	AGIP ECOMPERMANENT	BS 3161 - B
Steering box	SEMI - FLUID GREASE	NLG1
Fuel tank	UNLEADED FUEL 95 O.N.	
Windshield washer reservoir	Mixture of water and screen washer fluid	
Air conditioning	R 134 a ECOLOGICAL	
Front differential	AGIP ROTRA LSX SAE 75W/90	MIL - L2105 D
Power steering system	AGIP ATF II D	G. M. DEXTRON II D
Grease	AGIP 33 FD DROP POINT 240 °C	NLG13

Inner Engine Side Cover

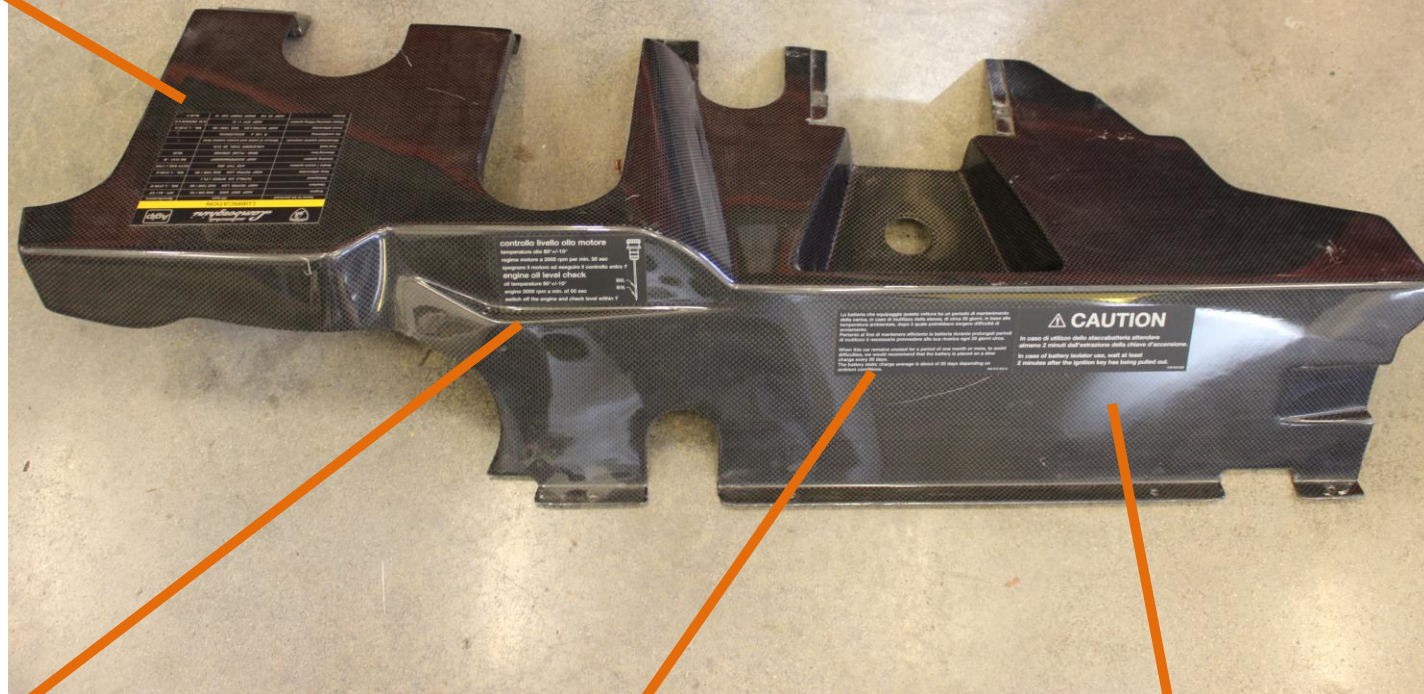

controllo livello olio motore

temperatura olio 80°+/-10°
regime motore a 2000 rpm per min. 60 sec
spegnere il motore ed eseguire il controllo entro 1'

engine oil level check

oil temperature 80°+/-10°
engine 2000 rpm a min. of 60 sec
switch off the engine and check level within 1'



La batteria che equipaggia questa vettura ha un periodo di mantenimento della carica, in caso di inutilizzo della stessa, di 30 giorni, in base alla temperatura ambientale, dopo il quale potrebbero sorgere difficoltà di avviamento.

Peranto al fine di mantenere efficiente la batteria durante prolungati periodi di inutilizzo e' necessario provvedere alla sua ricarica ogni 20 giorni circa.

When this car remains unused for a period of one month or more, to avoid difficulties, we would recommend that the battery is placed on a slow charge every 20 days.

The battery static charge average is about of 30 days depending on ambient conditions.

430010 523 A

⚠ CAUTION

In caso di utilizzo dello staccabatteria attendere almeno 2 minuti dall'estrazione della chiave d'accensione.

In case of battery isolator use, wait at least 2 minutes after the ignition key has been pulled out.

430010 523

